

December 8, 2014

NAME

Fluids-ID

Quiz 13. Suppose you buy a 4- by 8-ft sheet of plywood and put it on your roof rack. You drive the car at 35 mi/h. The flow is turbulent from the leading edge of the board and the board is perfectly aligned with the airflow. Find (a) the boundary layer thickness δ , (b) the local friction coefficient c_f , and (c) the wall shear stress τ_w at the end of the board and (d) the friction drag coefficient C_f and (e) the friction drag D_f on the upper side of the plywood. (Note: 1 mi/h = 1.4667 ft/s, 1 lb = 1 slug·ft/s², $\nu = 1.57 \times 10^{-4}$ ft²/s and $\rho = 2.38 \times 10^{-3}$ slugs/ft³)

Boundary layer thickness:

$$\delta(x) = \frac{0.16x}{Re_x^{1/7}}$$


Local friction coefficient:

$$c_f(x) = \frac{\tau_w}{\frac{1}{2}\rho U_\infty^2} = \frac{0.027}{Re_x^{1/7}}$$

Friction drag coefficient:

$$C_f = \frac{D_f}{\frac{1}{2}\rho U_\infty^2 A} = \frac{0.031}{Re_L^{1/7}}$$

where, $Re_x = U_\infty x / \nu$ and $Re_L = U_\infty L / \nu$

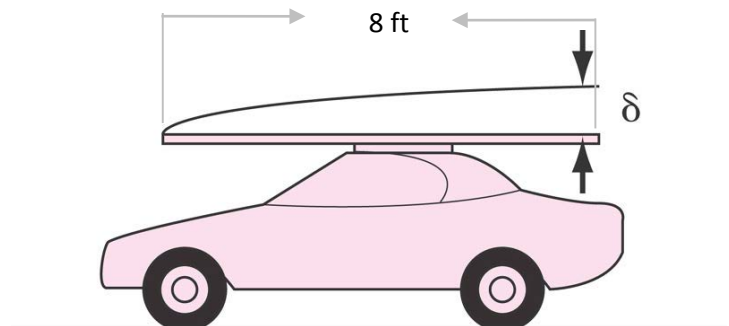

Note: Attendance (+2 points), format (+1 point)

Solution: